

4RS-2

Device Station Kit

The 4RS-2 is a universal 4-outlet device module kit that can be directly connected to the Tent-X controller through RJ12 cables. It takes up 4 device modules from the controller and comes with 4 outputs that are defaulted from left to right, including DSTx1, DSHx1, and DSPx2. The power cable is directly connected to the socket, making installation quick and easy. With a total amperage of 15A, users can power multiple devices at once, each output capable of providing up to 15A.



Specifications

4RS-2

Input Voltage

Input Voltage	120VAC, 60Hz
---------------	--------------

Max Output Voltage

Max Output Voltage	100~240VAC, 50/60Hz
--------------------	---------------------

Max Output Current

Max Output Current	15A
--------------------	-----

Max Input Current

Max Input Current	15A
-------------------	-----

Package Dimensions

Size	10.83" /275mm(L) x 6.89" /175mm(W) x 3.94" /100mm(H)
Gross Weight	3.31lbs /1.50kg

Working Environments

Temperature	32-104°F (0-40°C)
Humidity	≤90%


Package Content

Device Station Kit	1pc
--------------------	-----

Link Up

4RS-2

CONNECTION DIAGRAM

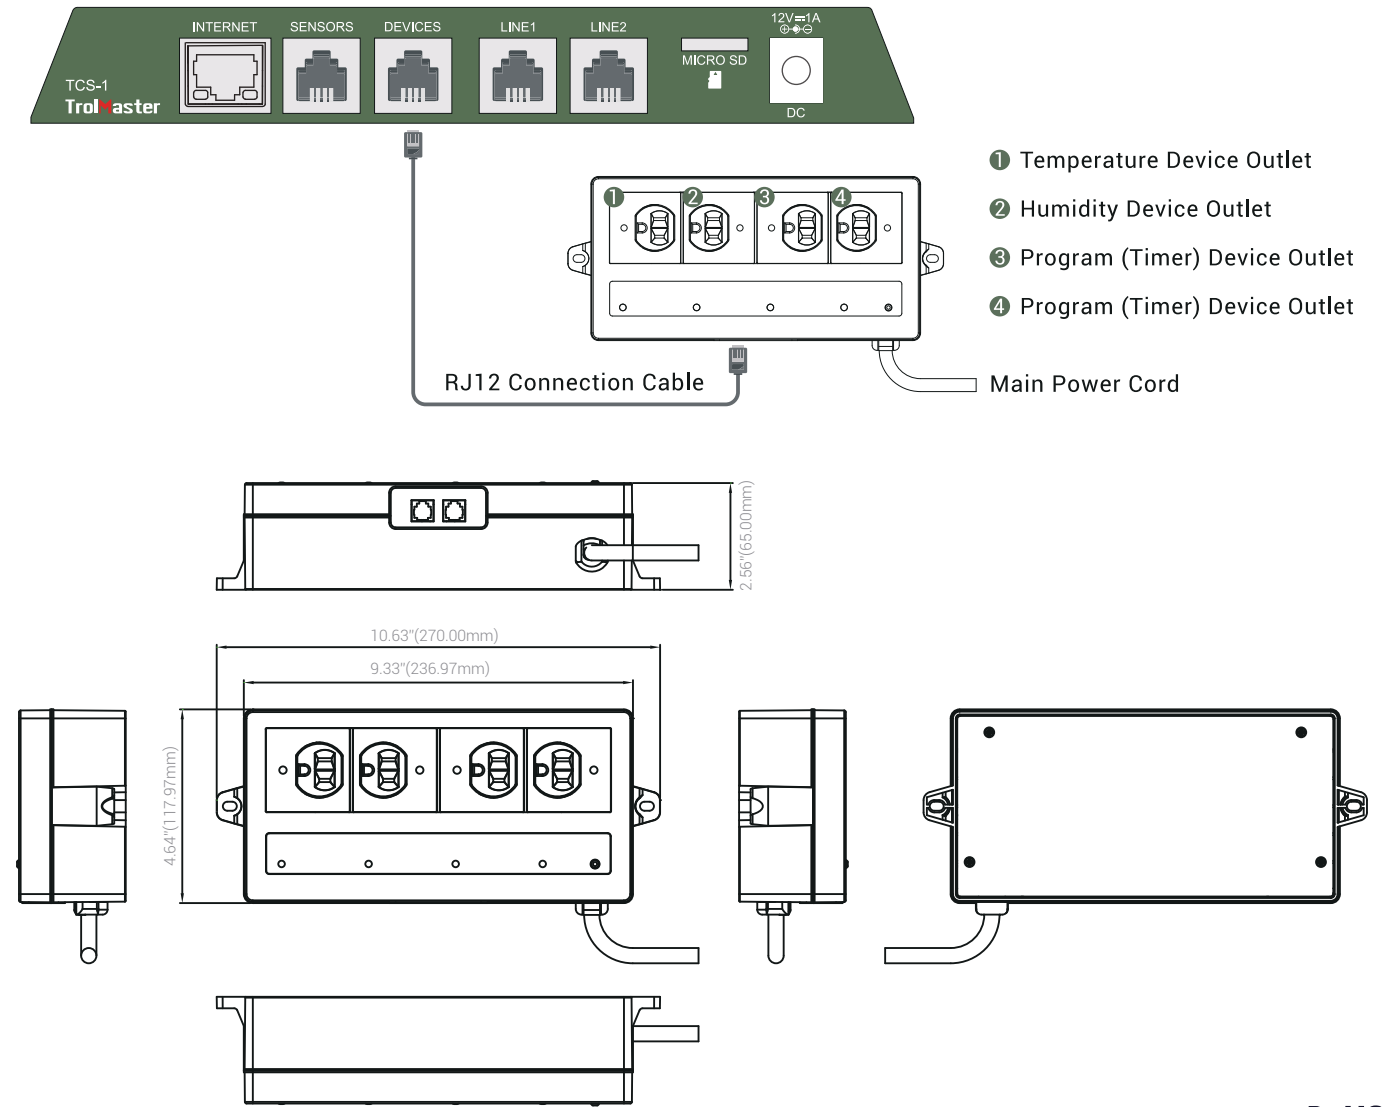

RoHS